

# Maestro 35

Electro-mechanical 2-post lift, 3.5 t capacity



## Application

- Repair and maintenance

## Description:

### Posts:

- Asymmetric post installation
- Very stable bent posts
- Without base frame
- Two motors
- Cold-rolled spindle
- Nylon nut sets
- Carriage with slide blocks
- Pushbutton control unit with alarm signal
- Programmable top stop
- Electronic synchronization

### Arms:

- Single telescopic front and double telescopic rear arms, as standard
- Possibility of parallel parking of arms
- Internal arm locking system
- Low minimum height

### Standard colours:

- Arms: RAL 3020 – red
- Posts: RAL 7016 – grey

## Versions:

- Available only with 400 V / 3 phases, 50 cycles
- F = flex pad
- CF = combiflex pad
- CF-08 = combiflex 08 pad
- DT/DT = 4 double telescopic arms

## Optional extras:

- Available with 2 different portal heights; alternatively in-ground kit
- LED-lighting set
- Power pack
- Set of expansion bolts
- Extra control unit
- Extension set for 2.35 F Version
- Large program of extra pads

**Special colours available on request!**



Scan the QR-Code  
for detailed product information.

Further Information on  
[www.autopstenhoj.com](http://www.autopstenhoj.com)

**autop Maschinenbau GmbH**

Sandkampstraße 90  
48432 Rheine | Germany

☎ +49 5971 8602-02

📠 +49 5971 8602-25

✉ info@autopstenhoj.com

**STENHØJ A/S**

Barrit Langgade 188-190  
DK-7150 Barrit



☎ +45 76 82 13 30

📠 +45 76 82 13 31

✉ info@autopstenhoj.com

Technical data	
Lifting capacity	3,500 kg
Lifting height	1,900 mm
Working height	1,995 – 2,025 mm
Lifting / lowering time	approx. 40 sec.
Motor	2 x 2.8 kW
Voltage	3 x 400V – 50 Hz – 25 A

Arm superstructure	
Lifting pad included in the delivery	F: 777395 CF: 777505 CF-08: 660501 + 777395
Min. height	95 mm
Drive-through width	2,290 mm
Width between posts	2,565 mm
Total width - outer edges posts	3,075 mm
Total width - outer edges base plates	3,320 mm
Total height post	2,706 mm
Total height incl. portal	4,350 mm
Arm length front, min. - max.	F Std: 600 – 1,220 mm
Arm length rear, min. - max.	F Std: 900 – 1,425 mm F DT: 600 – 1,220 mm

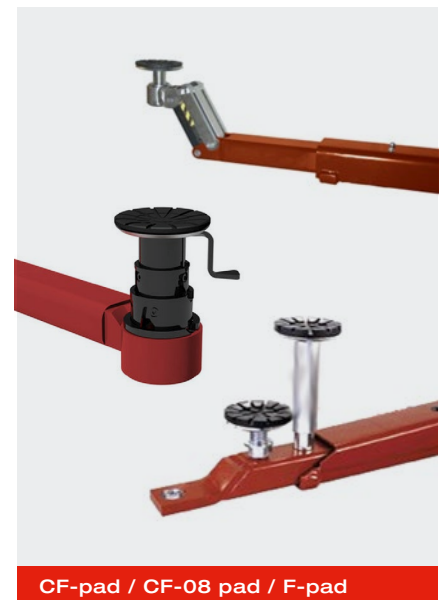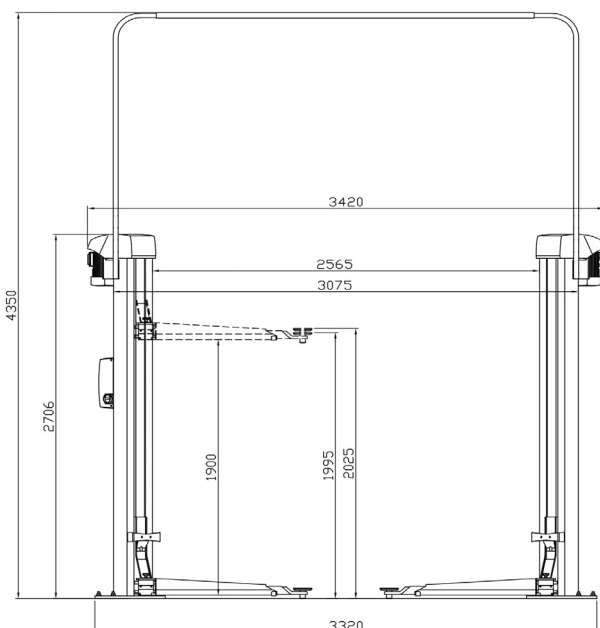

CF-pad / CF-08 pad / F-pad



Internal arm locking system