


Biglift 2.55 F 480

Electro-hydraulic twin-ram lift, 5.5 t with platforms

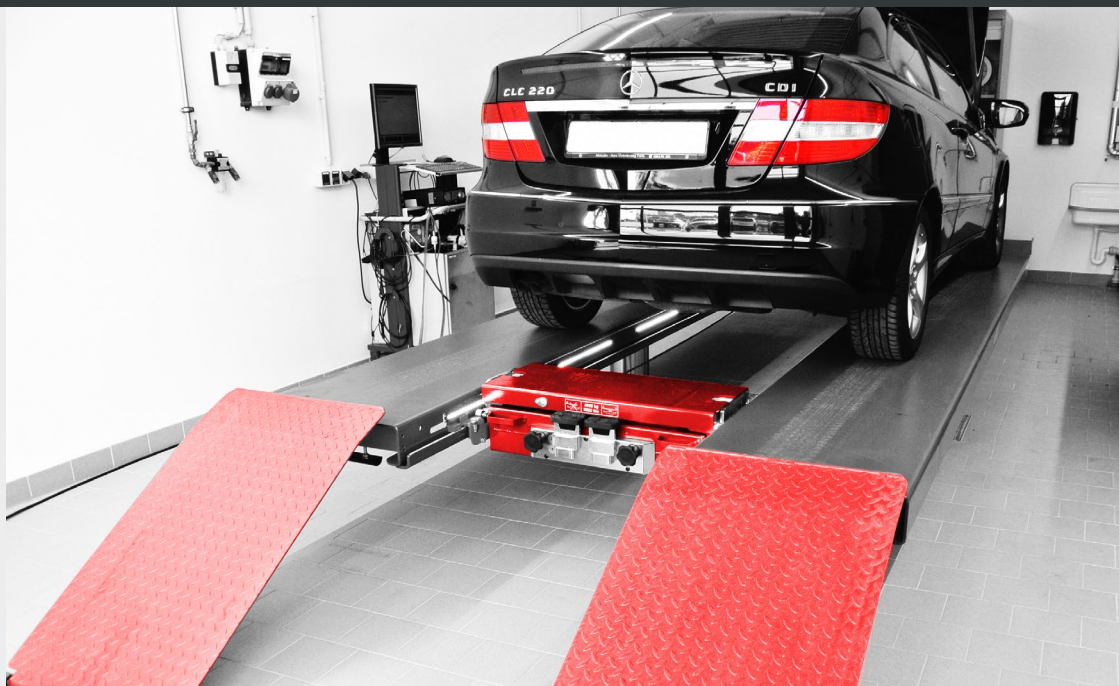

Application

- ☐ Check-in
- ☐ Repairs and maintenance
- ☐ Test

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- ☐ Great stability, even with uneven weight distribution; due to the cylinder diameter of 213 mm

Superstructure:

- ☐ A set of platforms with drive-on ramps and stops

Standard colours

- ☐ Platforms: RAL 7016 - grey
- ☐ Ramps: RAL 3020 - red

Versions:

Steel cassette:

- ☐ Zinc-coated
- ☐ Coated

Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor

Optional extras:

- ☐ LED-lighting set
- ☐ Scissor jack

Zinc coating and special colours on request!



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

autop Maschinenbau GmbH

Sandkampstraße 90
48432 Rheine | Germany

☎ +49 5971 8602-02

☎ +49 5971 8602-25

✉ info@autopstenhoj.com

STENHØJ A/S

Barrit Langgade 188-190
DK-7150 Barrit

☎ +45 76 82 13 30

☎ +45 76 82 13 31

✉ info@autopstenhoj.com

Technical data


Lifting capacity	5,500 kg
Lifting height	1,865 mm
Working height	2,030 mm
Cylinder diameter	2 x 213 mm
Distance between cylinders	1,550 mm
Lifting / lowering time (high pressure)	approx. 45 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	17 l
Voltage	230 / 400 V – 50 Hz – 16 A

Platforms

Total length	approx. 6,100 mm
Usable length of platform	4,800 mm
Wheel base	4,300 mm
Platform width	650 mm
Distance between platforms	900 mm
Drive-on height	165 mm

Scissor jack (Option)

Lifting capacity	2,600 Kg
Lifting height	250 mm
Operation	air-hydraulic
Lift positions	middle / 790 – 1,460 mm

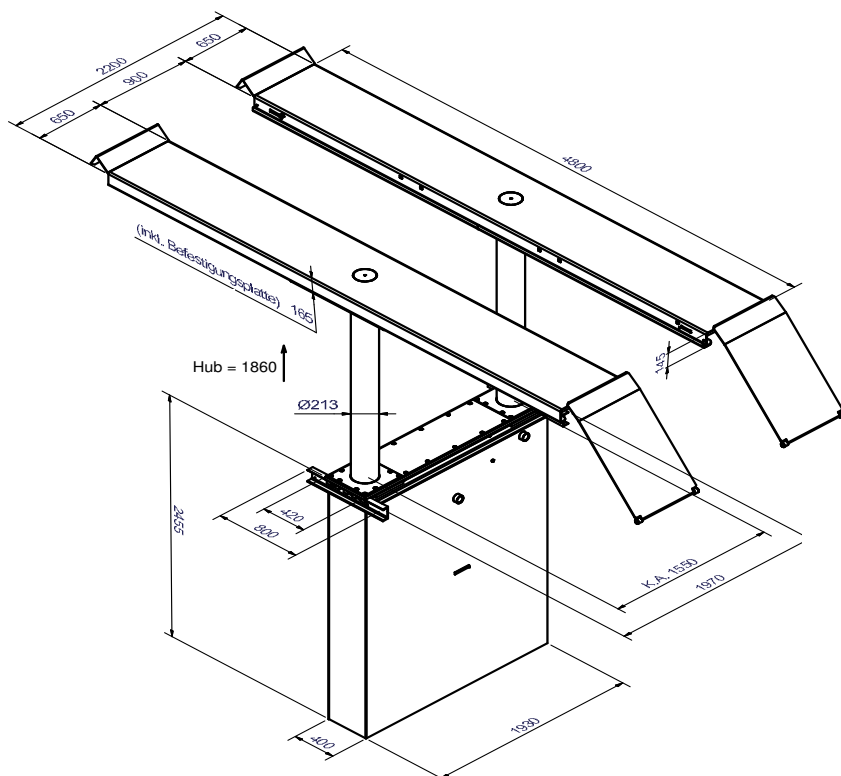

Scissor jack



Non-skid surface



LED lighting set