

# MagiX 50-52

Electro-hydraulic scissor lift with platforms, 5 t capacity



## Application

- ☐ Check-in
- ☐ Repair and maintenance
- ☐ Wheel alignment

## Description:

- ☐ Control unit with integrated pump unit, alarm signal and digital height indication
- ☐ Electronic synchronization
- ☐ Emergency lowering valve
- ☐ Sturdy scissor construction
- ☐ No mechanical connection between scissor sections
- ☐ Optimum access to vehicle
- ☐ Variable installation width

### Standard colours:

- ☐ Platforms and scissor: RAL 7016 grey
- ☐ Ramps: Galvanized

## Versions:

- ☐ Available with different voltages
- ☐ S = Flush platforms
- ☐ WL = With front recesses for turn tables and rear side slip plates
- ☐ C (Combi) = Platforms with integrated free-wheel lift
- ☐ Incl. guiding edges for scissor jack for all models as standard
- ☐ Base frame galvanized as standard
- ☐ 52 = 5,200 mm platforms
- ☐ Play detector with 6 movement directions

## Optional extras:

- ☐ Set of expansion bolts
- ☐ Set of rubber blocks, 80 mm
- ☐ KTL coating for platforms
- ☐ LED lightning set
- ☐ Installation frame for recessed installation
- ☐ Air hydraulic scissor jack

**Special colours available on request!**



Scan the QR-Code  
for detailed product information.

Further Information on  
[www.autopstenhoj.com](http://www.autopstenhoj.com)

#### AUTOPSTENHOJ GmbH

Sandkampstraße 90  
D-48432 Rheine  
☎ +49 5971 8602-02  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

#### AUTOPSTENHOJ GmbH


Barrit Langgade 188-190  
DK-7150 Barrit  
☎ +45 76 82 13 30  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

#### Technical data


|                         |                      |
|-------------------------|----------------------|
| Lifting capacity        | 5,000 kg             |
| Lifting height          | 1,850 mm             |
| Working height          | 2,150 mm             |
| Lifting / lowering time | 50 sec.              |
| Pump unit               | 3 kW                 |
| Voltage                 | 3x230 / 400V – 50 Hz |

#### Free-wheel lift

|                         |                  |
|-------------------------|------------------|
| Lifting capacity        | 3,500 kg         |
| Lifting height          | 500 mm           |
| Min. height             | 0 mm             |
| Lifting / lowering time | 8 / 8 sec.       |
| Operation               | hydraulic        |
| Length                  | 1,420 – 2,100 mm |

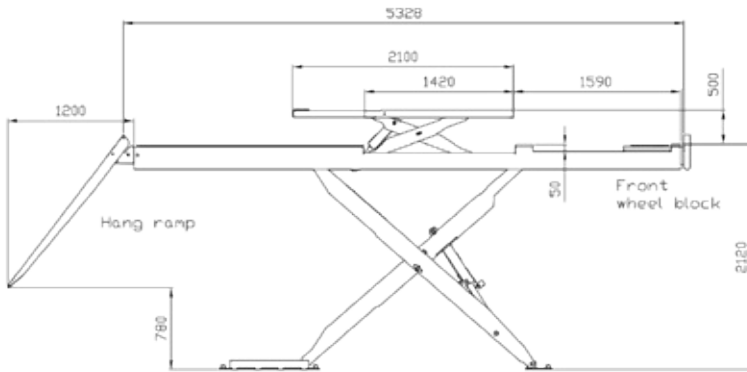


1) Floor ramp  
2) Hang ramp

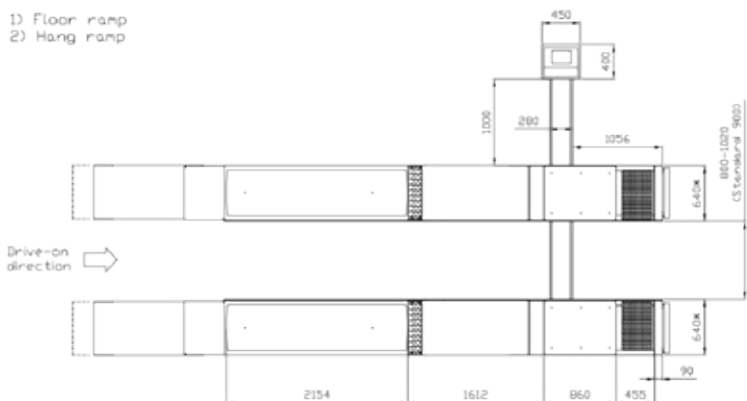

#### Scissor platforms

|                            |                |
|----------------------------|----------------|
| Platform length            | 5,200 mm       |
| Platform width             | 630 mm         |
| Distance between platforms | 800 – 1,020 mm |
| Min. height                | 255 mm         |
| Depth of recess            | 0 mm           |

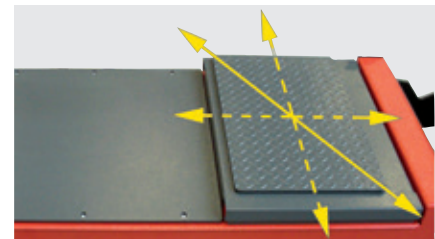


Play detector with 6  
movement directions



Control unit



Safety ratchet

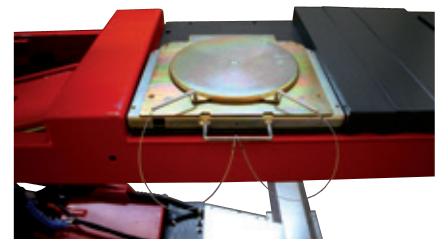

Recess for turn tables