


Electro-hydraulic twin-ram lift, 3.5 t with adjustable swivel arms

NxT Generation - Inground lifts

NxT Generation

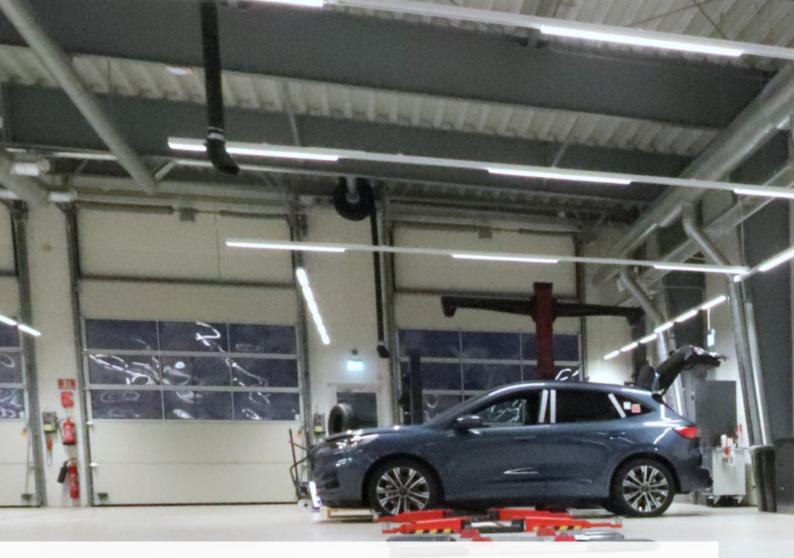

What's underneath should excite you just as much as what's on it.

Masterlift 2.35 NxT Saav VAN:

The double telescopic swivel arms convince with an **unconventional lifting area**, especially suitable for off-road vehicles and vans.

The superstructure is easily adjustable by means of a ball-bearing mounted sliding part on a cross-beam, for maximum flexibility.

The **internal arm locking system** installed as standard reliably protects against external influences.

The **strong 140 mm diameter cylinders** are also designed for long-lasting functionality and further round off the high quality level, which ensures **low maintenance requirements**.

Even in the event of a power blackout, the lift can still be lowered without any problems thanks to the pneumatic emergency lowering system. The Masterlift 2.35 NxT Saav VAN is perfectly completed by a **control system that is both visually and technically convincing**.


Also suitable for the safe lifting of electric vehicles.













And even more highlights: Inground technology reinvented!

With the **NxT Generation** inground lifts from AUTOPSTENHOJ you experience quality at the very highest level! We have made the best even better for you!

NxT Generation inground lifts: Flexible in installation and operation, also adaptable to possible, changing requirements in the future, due to our smart clamping system.

Synchronisation takes place either via a synchronisation bar or alternatively via a toothed rack. We achieve maximum stability through strong 140 mm cylinders and through our new aluminium guidance made of anodised solid material. With the new cassette cover, even strong forces acting on the cover during battery removal, for example, are safely absorbed.

The complete, sophisticated system gets by with only 10 litres of hydraulic fluid, thanks to proven high-pressure technology. Those who have the environment in mind should not disregard this fact.

The **NxT Generation inground lift** is suitable for all installation variants and thus, of course, also for self-supporting installation. The **NxT Generation inground lifts** are also always a good choice for replacement campaigns or retrofitting in third-party cassettes.

NxT Generation: Patented, flexible, modular





Technical data

Lifting capacity	3500 kg
Stroke length	1915 mm
Working height	Sport: 1990-2015 mm Universal: 2015-2055 mm
Cylinder diameter	2 x 140 mm
Cylinder distance	1550 mm
Lifting / lowering time	~ 30 sec.
Foundation depth	2640 mm
Pump unit	3.0 kW
Hydraulic fluid	10
Voltage	230/400 V / 50 Hz / 16 A

Arm superstructure

Total width	3160 mm
Lifting pad included in the delivery	Uni: 11027 95 - 135 mm (+ adapter 5 mm) Sport: 29265 70-95 mm (+ adapter 5 mm)
Min. height	Uni: 100 - 140 mm Sport: 75 - 100 mm + 65 mm height extension
Arm length, min max.	710 - 1443 mm
Arm insertion height	55 mm

Standard colour:

- Base plate: RAL 7016
- Arms: RAL 3020 optionally with KTL coating

Optional extras:

- Wide range of extra pads, depending on vehicle type
- Special colours on request

Variants:

- Synchronisation and safety via
- synchronisation bar
- toothed rack
- Self-supporting installation, without load on the bottom of the sub-casing

Installation variants:

- On-floor installation
- Ceiling installation

Frame:

• Standard: completely hot-dip galvanized

Sub-casing:

- Standard: painted
- Optional: hot-dip galvanized or plastic-coated





Electro-hydraulic twin-ram lift, 3.5 t with adjustable swivel arms

