

Maestro 2.65

Electro-mechanical 2-post lift, 6.5 t capacity



Application

- ☐ Repair and maintenance

Approvals / recommendations

- ☐ Mercedes-Benz
- ☐ Volkswagen Group

Description:

Posts:

- ☐ Symmetric post installation
- ☐ Very stable welded posts
- ☐ Without base frame
- ☐ Two motors
- ☐ Cold-rolled spindle
- ☐ Nylon nut sets
- ☐ Carriage with 6 guiding wheels and lubrication-free roller bearings
- ☐ Pushbutton control unit with alarm signal
- ☐ Programmable top stop
- ☐ Electronic synchronization

Arms:

- ☐ 4 triple telescopic arms
- ☐ Internal arm locking system
- ☐ Low minimum height

Standard colours:

- ☐ Arms: RAL 3020 – red
- ☐ Posts: RAL 7016 – grey

Versions:

- ☐ Available with different voltages
- ☐ F = flex pad

Optional extras:

- ☐ Available with portal or in-ground kit
- ☐ LED-lighting set
- ☐ Power pack
- ☐ Set of expansion bolts
- ☐ Extra control unit
- ☐ Long door stops
- ☐ Wheel holders
- ☐ Large program of extra pads

Special colours available on request!



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

autop Maschinenbau GmbH

Sandkampstraße 90
48432 Rheine | Germany

☎ +49 5971 8602-02

☎ +49 5971 8602-25

✉ info@autopstenhoj.com

STENHØJ A/S

Barrit Langgade 188-190
DK-7150 Barrit

☎ +45 76 82 13 30

☎ +45 76 82 13 31



✉ info@autopstenhoj.com

Technical data

Lifting capacity	6,500 kg
Lifting height	1,900 mm
Working height	2,045 – 2,105 mm
Lifting / lowering time	approx. 35 sec.
Motor	2 x 4 kW
Voltage	3 x 230 / 400V – 50 Hz – 35 / 25 A

Arm superstructure

Lifting pad included in the delivery	F: 11028 (90 – 150 mm)
Min. height	145 mm
Drive-through width	2,829 mm
Width between posts	3,170 mm
Total width - outer edges posts	3,560 mm
Total width - outer edges base plates	4,000 mm
Total height post	2,908 mm
Total height incl. portal	4,910 – 5,270 mm
Arm length front, min. - max.	770 – 1,640 mm
Arm length rear, min. - max.	770 – 1,640 mm

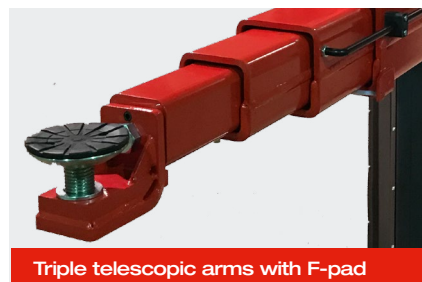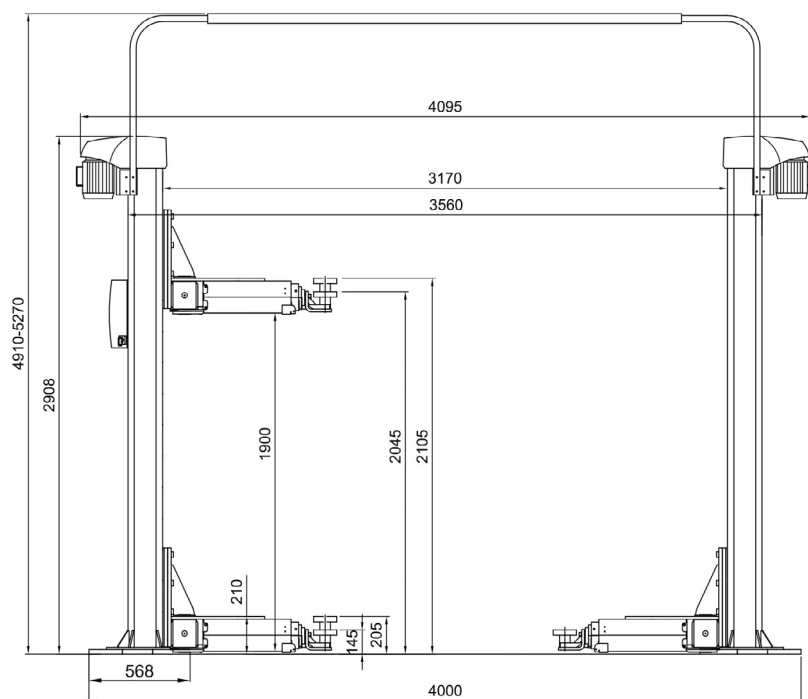

Triple telescopic arms with F-pad



Stable, welded post



Carriage with rollers